

# QB 系列旋涡泵

## SERIES PERIPHERAL PUMPS



QB series electric pumps can be used to transfer clean water or other similar water in physical and chemical properties. It is suitable for small living water supply, automatic water sprinkler system, small air conditioner system or supporting equipment etc.



QB 系列电泵主要用于输送清水和其他与水性质类似的液体，适用于家庭生活供水、自动浇灌系统、小型空调系统或配套设施等。

### WORKING CONDITIONS

- Max Temperature of Fluid up to +60°C
- Max Pressure 10bar
- Max Ambient Temperature up to 40°C

### 工作条件：

- 最高流体温度为60°C
- 最大可承受的压力10bar
- 最高环境温度40°C

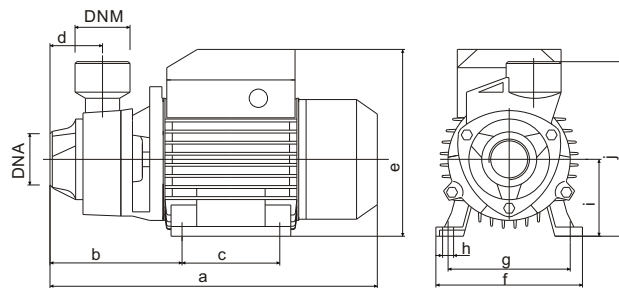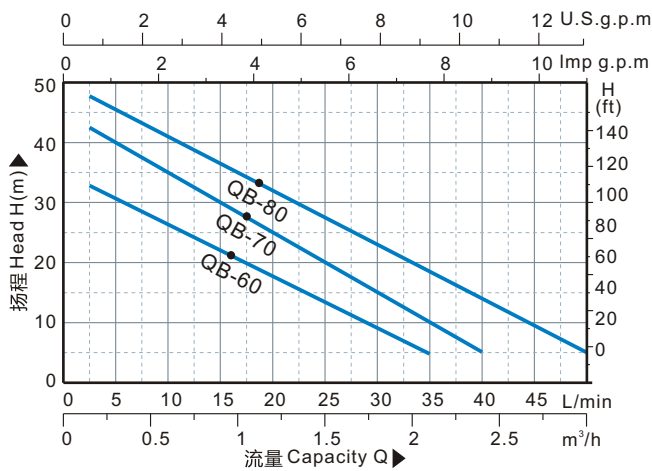

### 技术参数 TECHNICAL DATA AT 220~240V/50Hz

| 型号<br>TYPE | 输入功率<br>Input Power |     | 电流<br>Current<br>(A) | 最大流量<br>Q <sub>max</sub><br>(l/min) | 最高扬程<br>H <sub>max</sub><br>(m) | 最大吸程<br>S.Head<br>(M) | 转速<br>Speed<br>(r/min) | 流量 Capacity(l/min)   |    |    |    |    |    |    |    |    |    |   |  |  |  |
|------------|---------------------|-----|----------------------|-------------------------------------|---------------------------------|-----------------------|------------------------|----------------------|----|----|----|----|----|----|----|----|----|---|--|--|--|
|            | KW                  | HP  |                      |                                     |                                 |                       |                        | 0                    | 5  | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 |   |  |  |  |
| QB-60      | 0.37                | 1/2 | 1.6                  | 35                                  | 35                              | 9                     | 2850                   | 总扬程<br>Total head(m) | 35 | 30 | 26 | 22 | 18 | 13 | 9  |    |    |   |  |  |  |
| QB-70      | 0.55                | 3/4 | 2.4                  | 40                                  | 45                              | 9                     |                        |                      | 45 | 40 | 35 | 30 | 25 | 20 | 15 | 10 |    |   |  |  |  |
| QB-80      | 0.75                | 1   | 4.6                  | 50                                  | 50                              | 9                     |                        |                      | 50 | 45 | 41 | 36 | 32 | 27 | 23 | 18 | 14 | 9 |  |  |  |

Note: 110V/60Hz, 115V/60Hz, 127V/60Hz, 110/220V/60Hz, 380V/50Hz etc. Models are available on request  
备注: 可以按要求生产110V/60Hz, 115V/60Hz, 127V/60Hz, 110/220V/60Hz等电压频率

### 安装尺寸 DIMENSIONS

| 型号<br>TYPE | 外形尺寸 Dimensions(mm) |    |        |    |     |     |    |    |     |     |     |    |    | 包装尺寸<br>Packing Size (mm) |     |     | 毛重<br>G.W<br>KG | 包装数量<br>Packing QTY.<br>20'柜(Cont) |      |
|------------|---------------------|----|--------|----|-----|-----|----|----|-----|-----|-----|----|----|---------------------------|-----|-----|-----------------|------------------------------------|------|
|            | 进口 DNA              |    | 出口 DNM |    | a   | b   | c  | d  | e   | f   | g   | h  | i  | j                         | L   | W   |                 |                                    | H    |
|            | inch                | mm | inch   | mm |     |     |    |    |     |     |     |    |    |                           |     |     |                 |                                    |      |
| QB-60      | 1"                  | 25 | 1"     | 25 | 265 | 110 | 80 | 45 | 151 | 118 | 100 | 10 | 63 | 138                       | 285 | 150 | 165             | 5.3                                | 3400 |
| QB-70      | 1"                  | 25 | 1"     | 25 | 305 | 122 | 90 | 50 | 181 | 136 | 112 | 10 | 71 | 150                       | 320 | 180 | 200             | 9                                  | 2200 |
| QB-80      | 1.5"                | 40 | 1.5"   | 40 | 305 | 122 | 90 | 50 | 181 | 136 | 112 | 10 | 71 | 150                       | 330 | 180 | 200             | 9.5                                | 2000 |