

# PX 系列离心泵 SERIES CENTRIFUGAL PUMPS



PX series are single stage centrifugal pumps, can be used to transfer clean water or other similar water in physical and chemical properties. It is suitable for industrial use and urban water supply, pressure boosting for high buildings and fire system, garden irrigation, long-distance water transfer, heating ventilation and air controlling, circulation and pressure boosting for cold and hot water, and supporting equipment etc.



PX 系列为单级离心电泵，主要用于输送清水和其他与水性质类似的液体，适用于工业和城市供水、高层建筑增压、消防系统、园林灌溉、长途水输送、暖通和空气调节、冷热水循环增压和配套设施等。

## WORKING CONDITIONS

- Max Temperature of Fluid up to +60°C
- Max Pressure 10bar
- Max Ambient Temperature up to 40°C

## 工作条件：

- 最高流体温度为60°C
- 最大可承受的压力10bar
- 最高环境温度40°C

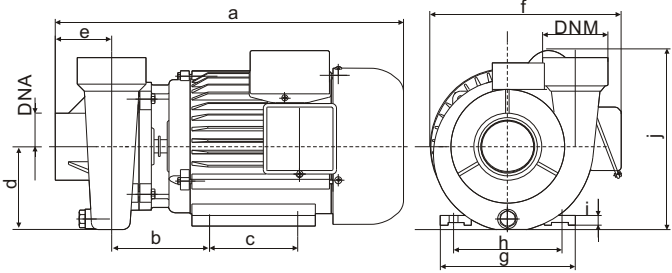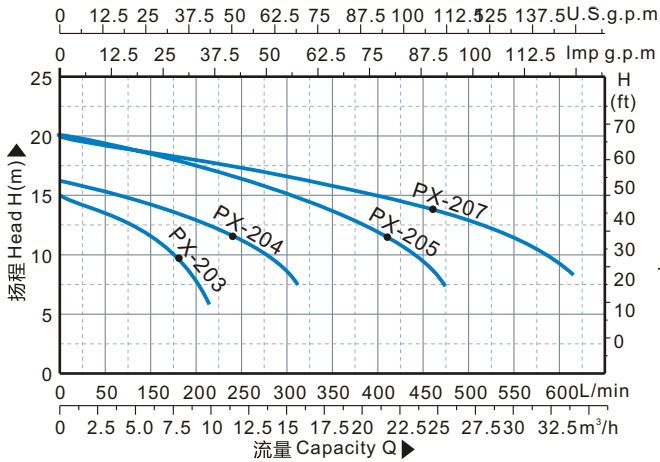

## 技术参数 TECHNICAL DATA AT 220~240V/50Hz

型号 TYPE	输入功率 Input Power		电流 Current (A)	最大流量 Q <sub>max</sub> (l/min)	最高扬程 H <sub>max</sub> (m)	最大吸程 S.Head (M)	转速 Speed (r/min)	流量Capacity(l/min)													
	KW	HP						0	50	100	150	200	250	300	350	400	500				
PX-203	0.55	3/4	3.6	160	15	9	2850	总扬程 Total head (m)	15	13.5	12	8									
PX-204	0.75	1	4.8	260	16	9			16	15	14	12.5	11	8							
PX-205	1.5	2	8.6	420	20	9			20	19	18	17.5	16.5	15	13	10	8				
PX-207	2.2	3	12.8	560	20	9			20	19	18.5	18	17	16	15.5	14	13.5	11			

Note: 110V/60Hz, 115V/60Hz, 127V/60Hz, 110/220V/60Hz, 380V/50Hz etc. Models are available on request  
备注: 可以按要求生产110V/60Hz, 115V/60Hz, 127V/60Hz, 110/220V/60Hz等电压频率

## 安装尺寸 DIMENSIONS

型号 TYPE	外形尺寸 Dimensions(mm)													包装尺寸 Packing Size (mm)			毛重 G.W KG	包装数量 Packing QTY 20'柜(Cont)	
	进口 DINA		出口 DNM		a	b	c	d	e	f	g	h	i	j	L	W			H
	inch	mm	inch	mm															
PX-203	1.5"	40	1.5"	40	330	155	90	80	45	190	138	110	10	199	360	220	230	16.5	1400
PX-204	2"	50	2"	50	330	155	90	80	45	190	138	110	10	199	360	220	230	18	1100
PX-205	2"	50	2"	50	375	182	102	90	67	224	170	136	10	215	430	280	265	22	900
PX-207	3"	75	3"	75	405	165	245	122	98	238	185	145	10	280	520	330	310	33.5	600