

SP 系列自吸射流泵

SERIES SELF-PRIMING PUMPS



Stainless steel pump body SP series self-priming electric pumps, equipped with waterproof plug & power cord and watertight switch, it is suitable for gardening, water supply, washing, increase water pressure, etc. It is usually combined with a pressure switch and a surge tank to be used as a Domestic Water System for distributing water.



不锈钢自吸泵SP系列采用防水插头及防水开关。广泛应用于家用及民用领域。可用于楼房的自动给水，井中取水，小规模灌溉，园艺用水及喷泉等。也可用于装配成自动供水。

WORKING CONDITIONS

- Max Temperature of Fluid up to +40°C
- Max Pressure 8bar
- Max Ambient Temperature up to 40°C

工作条件：

- 最高流体温度为40°C
- 最大可承受的压力8bar
- 最高环境温度40°C

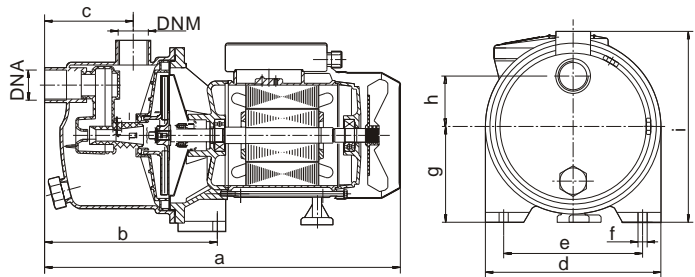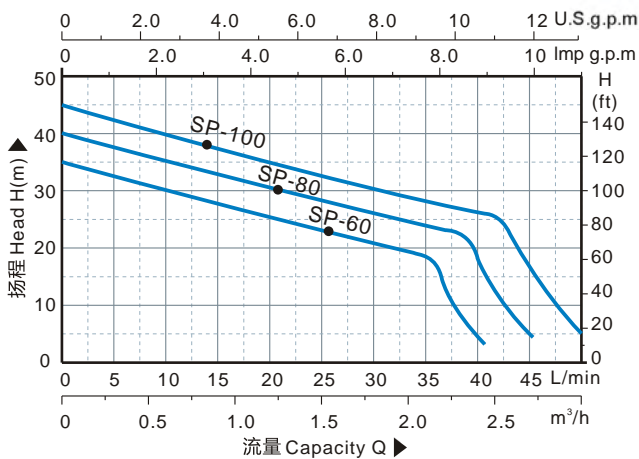

技术参数 TECHNICAL DATA AT 220~240V/50Hz

型号 TYPE	输入功率 Input Power		电流 Current (A)	最大流量 Q.max (l/min)	最高扬程 H.max (m)	最大吸程 S.Head (M)	转速 Speed (r/min)	流量 Capacity(l/min)													
	KW	HP						0	5	10	15	20	25	30	35	40	45	50			
SP-60	0.37	1/2	2.6	42	35	9	2850	总扬程 Total head(m)	35	32	30	27	25	23	20.5	17	4				
SP-80	0.55	3/4	3.6	46	40	9			40	38	35	33	30	28	26	24	19	5			
SP-100	0.75	1	4.8	52	45	9			45	42	39	37	35	32	30	28	26	16	6		

Note: 110V/60Hz, 115V/60Hz, 127V/60Hz, 110/220V/60Hz, 380V/50Hz ets. Models are available on request
备注: 可以按要求生产110V/60Hz, 115V/60Hz, 127V/60Hz, 110/220V/60Hz等电压频率

安装尺寸 DIMENSIONS

型号 TYPE	外形尺寸 Dimensions(mm)												包装尺寸 Packing Size (mm)			毛重 G.W KG	包装数量 Packing QTY 20'柜(Cont)	
	进口 DNA		出口 DNM		a	b	c	d	e	f	g	h	i	L	W			H
	inch	mm	inch	mm														
SP-60	1"	25	1"	25	373	190	95	196	96	11	105	56	188	420	215	230	9.5	1420
SP-80	1"	25	1"	25	373	190	95	196	96	11	105	56	188	420	215	230	10.5	1420
SP-100	1"	25	1"	25	373	190	95	196	96	11	105	56	188	420	215	230	11.5	1420